


Dust Test Chamber




Mobile phone scan
More product information

Energy Conservation

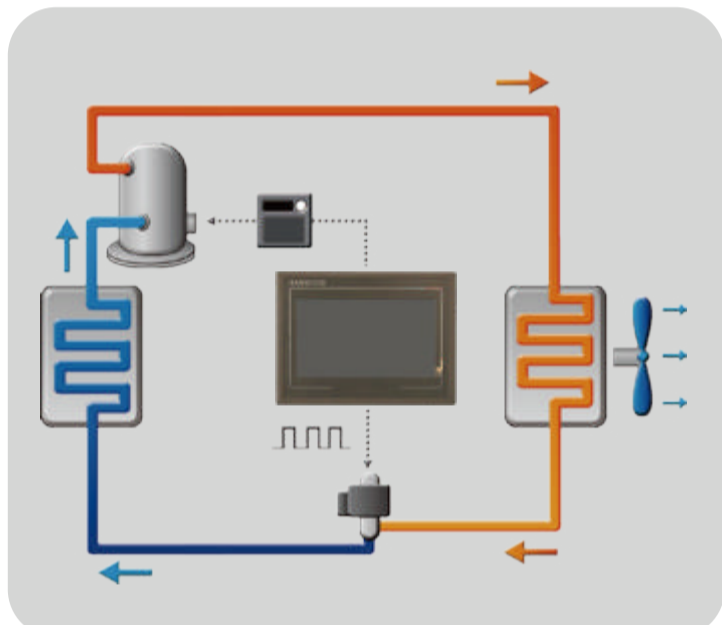

Remote network system

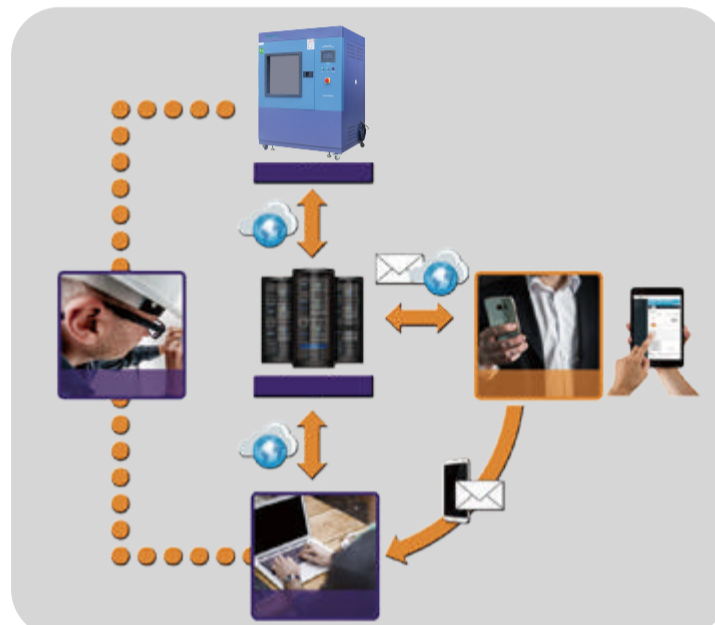

Circuit System



● Specifications

Model	SM-SC-500C	SM-SC-1000C	SM-SC-2000
Testing room volume	500L	1000L	2000L
Technical characteristics	Standard spacing of metal screens	50um	
	Standard spacing between lines	75um	
	Amount of talc	2Kg/m2~4Kg/m2	
	Dustfall form	1. Free fall dust type : The dust is blown to 1/5 of the tank top by centrifuge to make it free settling 2. Dust blowing : Bottom air blast , three grades pressure is adjustable	
Size	Inner size (mm)W*H*D	800*800*800	1000*1000*1000 1000*2000*1000
	Outer size (mm)W*H*D	1450*1700*1000	1650*1900*1200 1650*2900*1200
Control system	Testing room	Advanced brushed stainless steel	
	Shell	Cold plate rust proof and plastic spraying treatment	
	Operation panel	Digital smart touch key input	
	Operation mode	Constant operation	
	Input	PT-100 sensor	
Auxiliary function	Timing		
Standard configuration	With dust drying device, vibrator, sample holder, observation window (door)		
Safety protection	Overload breaking protection, earthing protection, etc.		
Power supply	AC380V TN-S		

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website